
3



venitem.com

ABSTRACT OF THE GENERAL CONDITIONS OF SALE

- 1. Prices include carton packing.
- 2. The volume indications, where specified, refer to the volume of the packing boxes of the items.
- 3. The weight indications, where specified, refer to the net weight of the items.
- 4. Venitem S.r.I. disclaims any liability for transport damage, as goods are carefully inspected and packed before shipment.
- 5. Any claims must be notified by fax or email within 8 days from receipt of goods.
- 6. The items shown in red are available until they are sold out. Before ordering, please contact our Customer Services to check availability. Tel: +39.041.5740374.
- 7. Venitem S.r.I. disclaims any liability for the non-observance, even partial, of the installation and assembly instructions provided or requested, or for the inappropriate use of the products it manufactures. Venitem S.r.I. will not be held liable for any property damage or personal injury caused by the incorrect installation of its products.
- 8. Dimensions and colors may vary from one production batch to another.
- 9. The details provided here are intended purely as guidance, as errors may have occurred during the printing process. Venitem S.r.I. may make alterations of any type to the products and relevant instructions without notice. Venitem S.r.I. does not provide legal guarantees regarding the accuracy of the data provided in this price list.
- 10. It is understood that any use of promotional material made available by Venitem S.r.l. implies full acceptance of the "Conditions for use of promotional material of Venitem S.r.l.".
- 11. Any dispute that may arise shall be subject to the sole jurisdiction of the Courts of Venice. In force







INTRUSION

OUTDOOR ALARM SOUNDERS

ACCADEMIA	
GIUDECCA	pag. 14
MOSE	pag. 16
MURANO	pag. 18
DOGE	
DOGE WIRELESS 2.0	pag. 22
DOGE PIEZO	pag. 24
HOLA	pag. 26
MARINA	
НЕМА	
RONDÒ	
TRIADE	
RIALTO	

INDOOR ALARM SOUNDERS

MINI GIUDECCA	pag. 40
MINI DOGE	pag. 42
MINI HEMA	pag. 44
	pag. 46
MINI MURANO	pag. 48
MINI HOLA	pag. 50
SP200	pag. 52

POWER SUPPLIES – MULTIFUNCTION TECHNOLOGY

MAGNETIC CONTACTS	pag. 70
RELAY AND MULTIFUNCTION BOARDS	pag. 66
BOXES FOR POWER SUPPLIES	pag. 62
12 VAC STABILIZED TENSION REDUCERS	
CCTV SWITCHING POWER SUPPLIES	
OUTDOOR POWER SUPPLIES IN WATERPROOF BOX	
STABILIZED POWER SUPPLIES IN BOX	
13.8 VDC AND 27.6 VDC SPECIAL POWER SUPPLIES FOR INTRUSION AND CCTV SYSTEM .	
ASPECIAL POWER SUPPLIES	pag. 56

OPTICAL-ACOUSTIC SIGNALERS	pag. 7	74

OUTDOOR DETECTORS

FARO TRIBALANCE	
FARO TRIBALANCE 8.12 ENERGY LINE	pag. 80
FARO IP PLUS	pag. 82
FARO DEDZONE	pag. 83
FARO IP ENERGY LINE	pag. 84
FARO MINI	pag. 85
FARO WINDO	pag. 86

INDOOR DETECTORS

FARO SUPER DTpa	g. 90
FARO DT-AM PLUSpa	g. 91

FIRE

FIRE AND EVACUATION RANGE

D0GE F24	pag. 96
TRIADE F24	pag. 98
MOSE E24EN	pag. 100
MUBANO E24EN	pag. 102
HOLA E24EN	pag. 104
MINI DOGE E24	pay. 100
MINI DOGE FL24EN DOGE EV	pag. 108
DOGE EV	pag. 108
CI PLEXIGLASS	pag. 110

CERTIFIED FIRE POWER SUPPLIES

TUL 500 EN	pag. 114
TUL 375 EN / TUL 373 EN	pag. 115

SOUNDERS AND PANELS FOR EMERGENCY EXIT

HOLA UECP	pag. 118
TRIADE UE	
TPUS	pag. 122







EGEND



Production warranty



IMQ Safety Systems Certification



Complying with IMQ EN 50131-6 Standard



Complying with EN 54-3 Standard



Complying with EN 54-4 Standard



Compliant with EN 50131-4 Standard





Compliant with EN 50849 Standard



INCERT Certification



Security level



Protection level



Environmental class



Positive and negative ON/OFF settable



Command for sound interruption



☑

Battery control according to EN 50131 standard



Optical and acoustic ON/OFF signaling



Optical ON/OFF signaling




Customizable RGB LED optical **ON/OFF** signaling

Flash reset

Number of timings settable by dip switch





Spirit level



Patented LED lighting system



Anti-opening and anti-removal tamper system

Vocal system with digital audio module



Magnetic tamper reed



Tamper micro switch gold plated contacts

Anti-foam and anti-shock system



Anti-drilling system



Speaker



High-power speaker



Alarm counting



Flashing light separately switchable



Output for faults/anomalies





Polycarbonate



Cover in ABS anti UV



Painted metal



Stainless steel





Painted cover in ABS VØ



Number of sounds settable for alarm and pre-alarm



Two sounds of different power



LED lighting: 1 blue / 5 blue / 5 white



BLUE LED for system ON/OFF signaling and courtesy-light function



HIGH-POWER adjustable sound



Settable acoustic ON/OFF signaling



Input/output adjustable timing



A single unit controls up to 3 doors



3 alarm inputs and 1 input 24 h




Venitem Cloud application




INTRUSION



OUTDOOR ALARM SOUNDERS

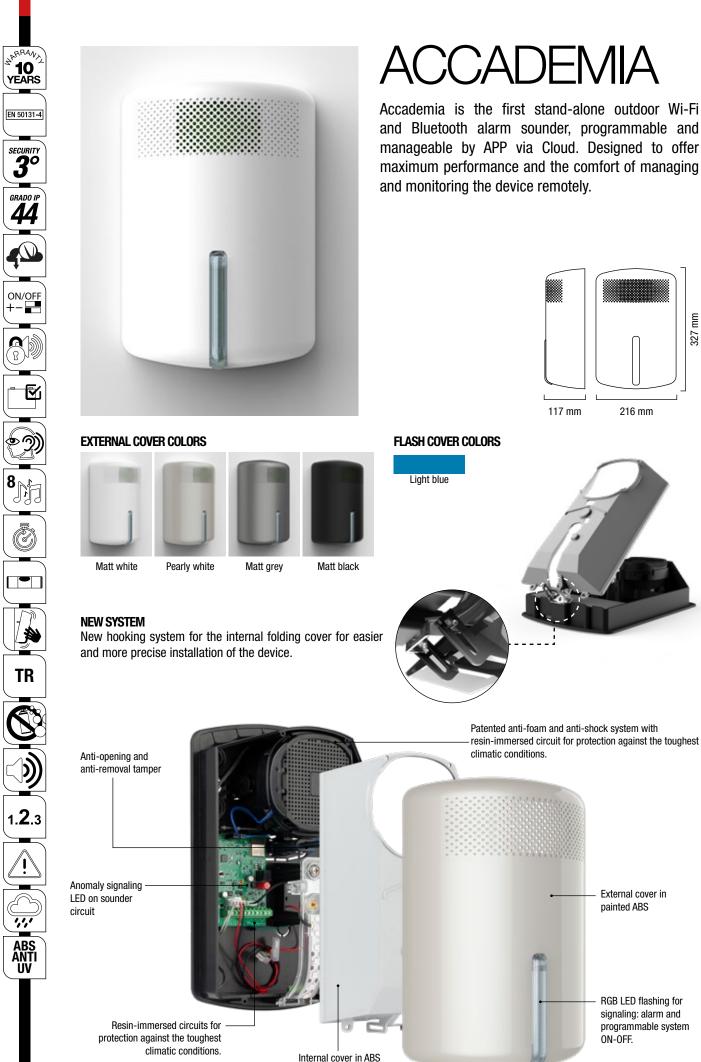

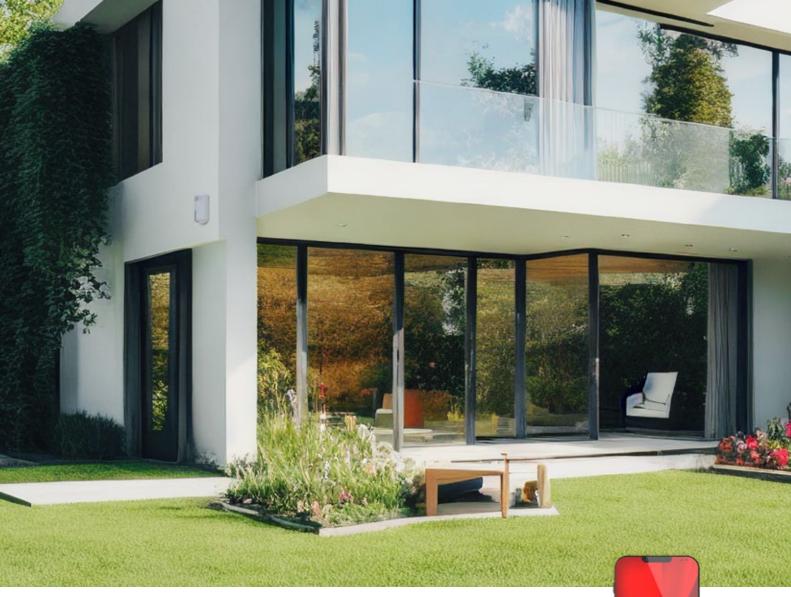

APP VENITEM-CLOUD

For installer: Pairing, programming, management and monitoring of connected devices remotely (connection via Wi-Fi) or on-site (connection via Bluetooth) Push notifications* for anomaly messages.


For user: Activation/deactivation of the device, activation of the block speaker and monitoring of the system status via the APP from the dedicated dashboard*.

* Feature available only with sounder connected to Internet

AVER	J
ALCOSTLA	
VENITE	M

	UNITS/PACK	PRICE PER UNIT €
CADEMIA LS 13.8 Vdc self-powered sounder, anti-foam and anti-shock device - Bluetooth and Wi-Fi module - high luminosity and low consumption RGB LED flashing unit.	6	230,00


PERSONALIZZAZIONI	PRICE PER UNIT €
Extra cost for customized colors (50 pcs min.)	UPON REQUEST
Embossed stickers (200 pcs. min.) - Serigraphies (50 pcs. min.) - Decal (50 pcs. min.)	UPON REQUEST





(\mathbf{z})


In-wall sounder for outdoors with RGB LED flashing unit for the management of the optical alerts.

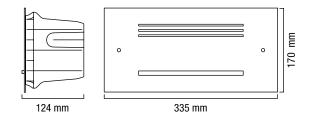

EXTERNAL COVER COLORS



Colour available at extra cost

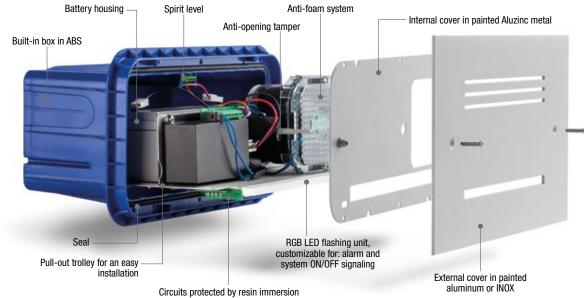

against the hardest climatic conditions




DRILLING TEMPLATE

Drilling template to easily make the hole for Giudecca in-wall box in case of already existing walls.

BUILT-IN BOX

- Built-in box provided in first-rate ABS with seal.
- Removable cover in galvanized metal.



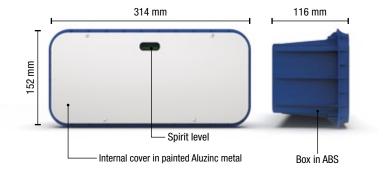


CHIDECCA	UNITS/PACK	PRICE PER UNIT €
GIUDECCA ► 13.8 Vdc self-powered sounder with LED flashing unit, anti-foam and anti-removal tamper.	1	315.00

CUSTOMIZATIONS	PRICE PER UNIT €
* Extra cost for brushed stainless steel finishing	45.00
Extra cost for customized colors (50 pcs min.)	UPON REQUEST



()S

Outdoor sounder that integrates acoustic signaler and LED system for night lighting and optical signaling. Also available in vocal version.



+ Until supplies last

TECH COLORS

Shiny black **

Shiny grey **

EXTERNAL COVER COLORS





FLASH COVER COLORS

Light blue

MOSE LSP VOCAL LUX








MOSE L	UNITS/PACK	PRICE PER UNIT
■ 13.8 Vdc self-powered sounder with LED flashing unit.	5	218.00
MOSE LS		
3 13.8 Vdc self-powered sounder with LED flashing unit, anti-foam and anti-shock device.	5	236.00
MOSE LSP		
 13.8 Vdc self-powered sounder with LED flashing unit, anti-foam and anti-shock device and anti-drilling system. 	5	274.00
MOSE L LUX		
3 13.8 Vdc self-powered sounder with LED flashing unit and patented LED lighting system.	5	324.00
 MOSE LS LUX 13.8 Vdc self-powered sounder with LED flashing unit, anti-foam and anti-shock device and patented LED lighting system. 	5	342.00
MOSE LSP LUX		
 13.8 Vdc self-powered sounder with LED flashing unit, anti-foam and anti-shock device, anti-drilling system and and patented LED lighting system. 	5	381.00
MOSE L VOCAL 3 ²⁷ ► 13.8 Vdc self-powered sounder with LED flashing unit and vocal module.	5	374.00
MOSE LS VOCAL		
 13.8 Vdc self-powered sounder with LED flashing unit, anti-foam and anti-shock device and vocal module. 	5	400.00
MOSE LSP VOCAL		
 13.8 Vdc self-powered sounder with LED flashing unit, anti-foam and anti-shock device, anti-drilling system and vocal module. 	5	438.00
MOSE L VOCAL LUX		
13.8 Vdc self-powered sounder with LED flashing unit, patented LED lighting system and vocal module.	5	480.00
MOSE LS VOCAL LUX		
 13.8 Vdc self-powered sounder with LED flashing unit, anti-foam and anti-shock device, patented LED lighting system and vocal module. 	5	506.00
MOSE LSP VOCAL LUX		
 13.8 Vdc self-powered sounder with LED flashing unit, anti-foam and anti-shock device, anti-drilling system, patented LED lighting system and vocal module. 	5	544.00
DUMMY		
Mose housing only.	5	129.00
CUSTOMIZATIONS		PRICE PER UNIT
* Extra cost for Chromium color		21.00
** Extra cost for tech colors		73.00
Extra cost for customized colors (50 pcs. min.)		UPON REQUES
Embossed stickers (200 pcs. min.) - Serigraphies (50 pcs. min.) - Decal (50 pcs. min.)		UPON REQUES





MURANO

Outdoor sounder with a strong aesthetic personality that enhances the architecture in which it is integrated. 1° Prize for Design *Safety&Security Awards*



EXTERNAL COVER COLORS





Pearly white

Silver grey Shiny anth grey

FLASH COVER COLORS

Smoke grey

MURANO LSP






	UNITS/PACK	PRICE PER UNIT €
MURANO L		
30 Not self-powered sounder with LED flashing unit.	5	200.00
MURANO LS		
37 13.8 Vdc self-powered sounder with LED flashing unit and anti-foam and anti-shock device.	5	217.00
MURANO LSP		
13.8 Vdc self-powered sounder with LED flashing unit, anti-foam and anti-shock device and anti-drilling system.	5	255.00
DUMMY		
Murano housing only.	5	109.00
CUSTOMIZATIONS	PRICE PER UNIT	
Extra cost for customized colors (50 pcs. min.)	UPON REQUEST	
Embossed stickers (200 pcs. min.) - Serigraphies (50 pcs. min.) - Decal (50 pcs. min.)	UF	PON REQUEST





DOGE

Outdoor sounder with an eclectic design, available in a wide color range and suitable for any environment.



EXTERNAL COVER COLORS




FLASH COVER COLORS

Light blue

Smoke grey


DOGE LSP

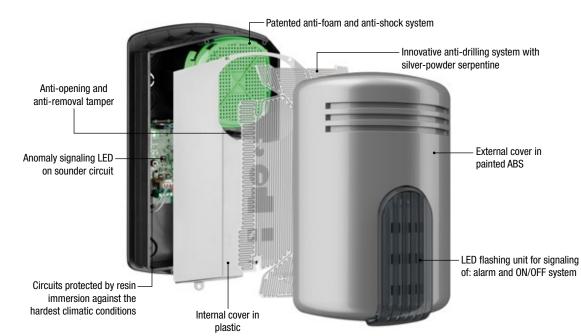



		UNITS/PACK	PRICE PER UNIT €
DOC	GE L		
SECURITY 3°	13.8 Vdc self-powered sounder with LED flashing unit.	6	181.00
DO	GE LS		
security 3° ►	13.8 Vdc self-powered sounder with LED flashing unit, anti-foam and anti-shock device.	6	197.00
DO	GE LSP		
	13.8 Vdc self-powered sounder with LED flashing unit, anti-foam and anti-shock device and anti-drilling system.	6	236.00
DUI	MMY		
►	Doge housing only.	6	102.00

CUSTOMIZATIONS	PRICE PER UNIT €
Extra cost for customized colors (50 pcs. min.)	UPON REQUEST
Embossed stickers (200 pcs. min.) - Serigraphies (50 pcs. min.) - Decal (50 pcs. min.)	UPON REQUEST






DOGE WIRELESS 2.0

Wireless outdoor sounder designed to serve complex installations.

- Secure alarm detection
- Two-way patented DSSS modulation wireless system
- Resilient to jamming
- Resistant to radio background noise
- High autonomy of batteries



EXTERNAL COVER COLORS



TBA 7.5 7.5 Vdc alkaline battery pack.



FLASH COVER COLORS


Light blue

Smoke grey

DOGE WIRELESS 2.0





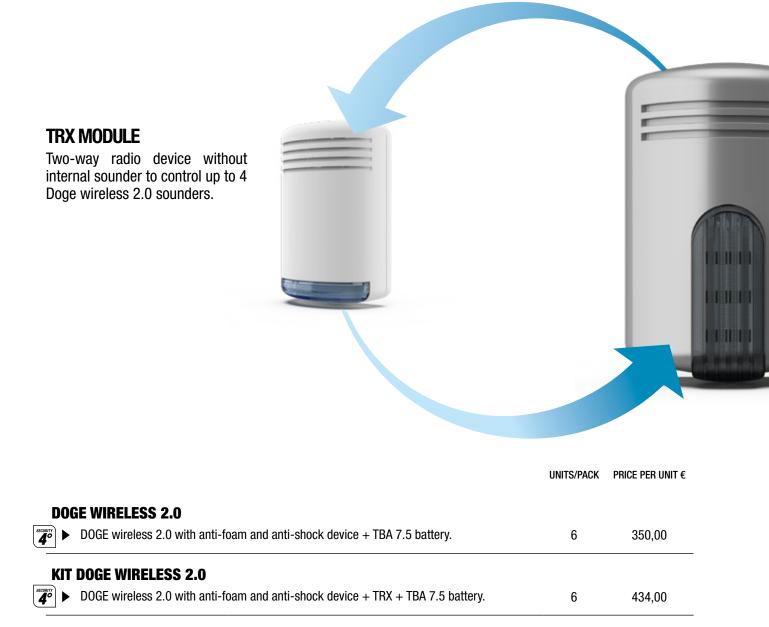

TRX MODULE

► Two-way radio device

ACCESSORIE	S	UNITS/PACK	PRICE PER UNIT €
Anti-drilling s	ystem with silver-powder serpentine	1	45,00
TBA 7.5	7.5 Vdc alkaline battery pack.	1	52,00


1

88,00



DOGE PIEZO

Self-powered sounder for 12 Vdc low-consumption applications (400 mA). Also available in standard 13.8 Vdc and remotely-powered versions (without battery).



EXTERNAL COVER COLORS



FLASH COVER COLORS

Light blue

Smoke grey

DOGE L PIEZO





		UNITS/PACK P	PRICE PER UNIT €
DOC	E L PIEZO NI-MH		
SECURITY 3°	Self-powered sounder with LED flashing unit. Double-piezo circuit for low-consumption applications (12 Vcc - 400 mA max). 9.6 Vdc 2.2 Ah Ni-Mh battery not included. For \leq 12 Vdc control panels.	6	145.00
DOC	E L PIEZO		
	13.8 Vdc self-powered sounder with LED flashing unit and double-piezo circuit. Remotely-powered version available upon request (without battery).	6	145.00
ACC	ESSORIES	UNITS/PACK	PRICE PER UNIT €
BATT	ERY 9.6 Vdc 2.2 Ah Ni-Mh battery for Doge L Piezo Ni-Mh.	1	98.00
CUS	TOMIZATIONS	PRICE	E PER UNIT €
Extra	cost for customized colors (50 pcs. min.)	UPON REQUEST	
Emb	ossed stickers (200 pcs. min.) - Serigraphies (50 pcs. min.) - Decal (50 pcs. min.)	UPON REQUEST	






HOLA

Outdoor sounder with elegant and linear design, developed to suit any kind of contexts and offer a wide range of personalization possibilities.

Hola can be installed both vertically and horizontally.




EXTERNAL COVER COLORS



FLASH COVER COLORS


Light blue

HOLA LSP

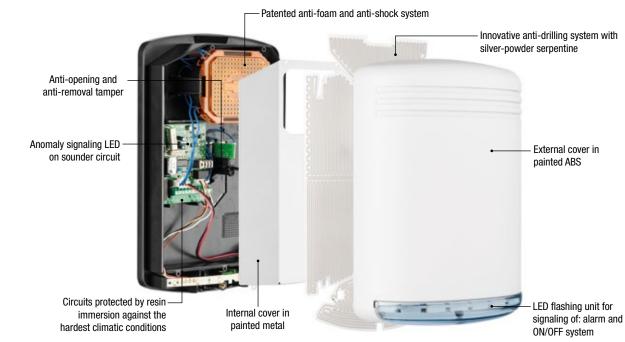




	UNITS/PACK	PRICE PER UNIT €
HOLA L		
■ 13.8 Vdc self-powered sounder with LED flashing unit.	6	181.00
HOLA LS		
13.8 Vdc self-powered sounder with LED flashing unit, anti-foam and anti-shock device.	6	196.00
HOLA LSP		
13.8 Vdc self-powered sounder with LED flashing unit, anti-foam and anti-shock device and anti-drilling system.	6	236.00
DUMMY		
Hola housing only.	6	100.00
CUSTOMIZATIONS	PF	ice per unit €
Extra cost for customized colors (50 pcs. min.) UPON REQUE		PON REQUEST
Embossed stickers (200 pcs. min.) - Serigraphies (50 pcs. min.) - Decal (50 pcs. min.)	UF	PON REQUEST





MARINA

Outdoor sounder with integrated LED system for signaling of 3 different system status.



EXTERNAL COVER COLORS






FLASH COVER COLORS

Light blue

LED SIGNAL OPTIONS

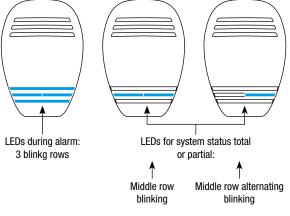

MARINA LS






UNITS/PACK PRICE PER UNIT €

MARINA L		
13.8 Vdc self-powered sounder with LED flashing unit.	6	155.00
MARINA LS		
▶ 13.8 Vdc self-powered sounder with LED flashing unit, anti-foam and anti-shock device.	6	168.00
DUMMY		
Marina housing only.	6	80.00
CUSTOMIZATIONS	PF	RICE PER UNIT €
Extra cost for customized colors (50 pcs. min.)	UPON REQUEST	
Embossed stickers (200 pcs. min.) - Serigraphies (50 pcs. min.) - Decal (50 pcs. min.)	U	PON REQUEST

29

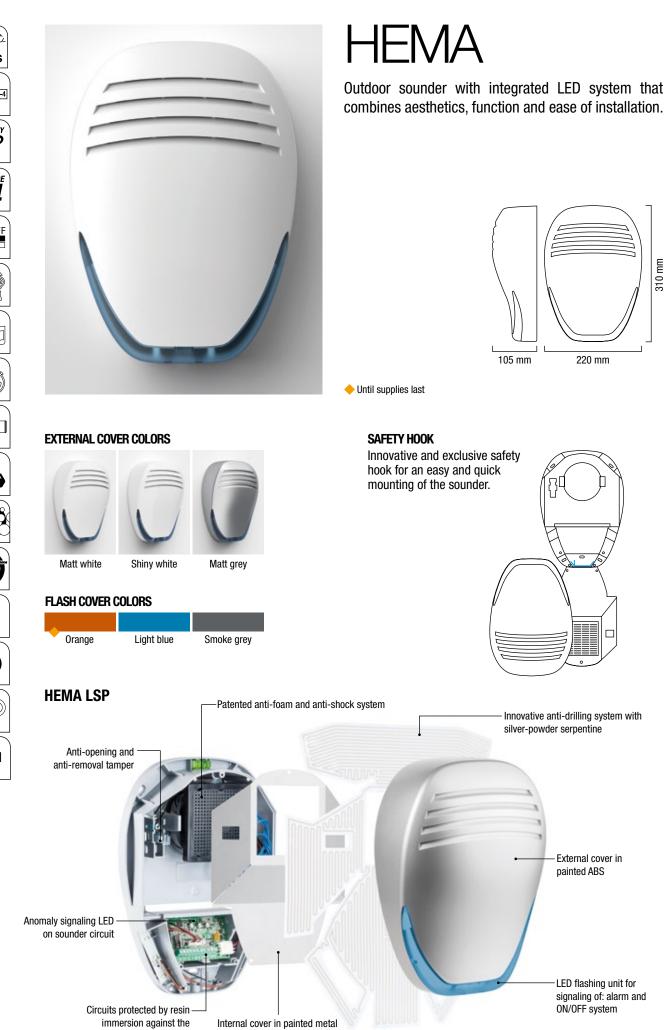

310 mm

ARRAN **10[°]**YEARS EN 50131-4 IP GRADE 44 ON/OFF + ╴┝╴╴ TR) ',',' ABS ANTI UV

hardest climatic conditions




	UNITS/PACK	PRICE PER UNIT €
HEMA L		
13.8 Vdc self-powered sounder with LED flashing unit.	6	137.00
HEMA LS		
13.8 Vdc self-powered sounder with LED flashing unit, anti-foam and anti-shock device.	6	161.00
HEMA LSP		
13.8 Vdc self-powered sounder with LED flashing unit, anti-foam and anti-shock device and anti-drilling system.	6	201.00
DUMMY		
Hema housing only.	6	85.00
CUSTOMIZATIONS	PF	RICE PER UNIT €
* Extra cost for Chromium color	22.00	
Extra cost for customized colors (50 pcs. min.)	U	PON REQUEST
Embossed stickers (200 pcs. min.) - Serigraphies (50 pcs. min.) - Decal (50 pcs. min.)	U	PON REQUEST





{


Outdoor sounder with LED flashing unit for signaling of: alarm, system status, with versatile design and easy installation.



+ Until supplies last

220 mm

SAFETY HOOK Innovative and exclusive safety hook for an easy and quick mounting of the sounder.



Internal cover in painted metal

External cover in painted ABS

LED flashing unit for signaling of: alarm and ON/OFF system

RONDÒ

White

Smoke grey

FLASH COVER COLORS

EXTERNAL COVER COLORS


Metal grey

^c Chromium

32




	UNITS/PACK	PRICE PER UNIT €
RONDÒ L 30 Vdc self-powered sounder with LED flashing unit.	6	132.00
DUMMY		
Rondò housing only.	6	85.00
CUSTOMIZATIONS	PR	ICE PER UNIT €
* Extra cost for Chromium color	21.00	
Extra cost for customized colors (50 pcs. min.)	UPON REQUEST	
Embossed stickers (200 pcs. min.) - Serigraphies (50 pcs. min.) - Decal (50 pcs. min.)	UPON REQUEST	






TRIADE

Outdoor sounder with high-resistance ABS external cover.




EXTERNAL COVER COLORS



FLASH COVER COLORS

Orange

TRIADE LS

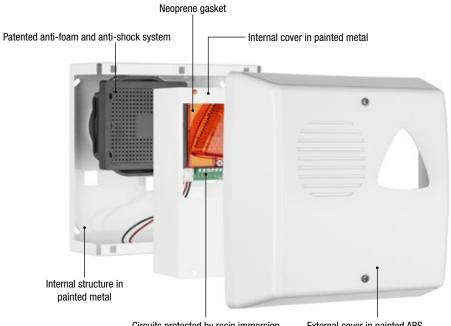


Circuits protected by resin immersion against the hardest climatic conditions

External cover in painted ABS



	UNITS/PACK	PRICE PER UNIT €				
TRIADE L 3.8 Vdc self-powered sounder with triangular LED flashing unit.	6	144.00				
TRIADE LS						
 13.8 Vdc self-powered sounder with triangular LED flashing unit, anti-foam and anti-shock device. 	6	169.00				
DUMMY						
Triade housing only.	6	69.00				


CUSTOMIZATIONS	PRICE PER UNIT €
Extra cost for customized colors (50 pcs. min.)	UPON REQUEST
Embossed stickers (200 pcs. min.) - Serigraphies (50 pcs. min.) - Decal (50 pcs. min.)	UPON REQUEST





RIALTO

Outdoor sounder in painted metal with rigorous lines, resistant to weather conditions. Available in stainless steel version.



EXTERNAL COVER COLORS




FLASH COVER COLORS

Orange

RIALTO LSX

Neoprene gasket

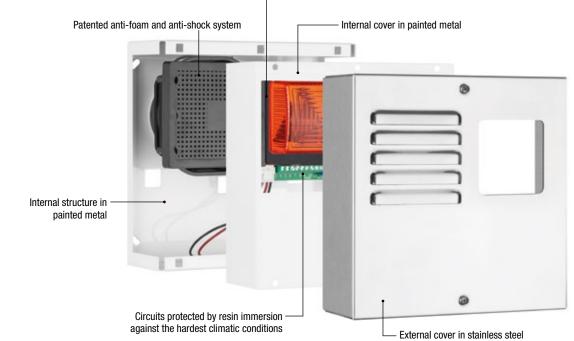




		UNITS/PACK	PRICE PER UNIT 🕯
RIA	LTO L		
	13.8 Vdc self-powered sounder in painted metal with LED flashing unit.	6	141.00
RIA	LTO LS		
	13.8 Vdc self-powered sounder in painted metal with LED flashing unit, anti-foam and anti-shock device.	6	169.00
RIA	LTO X		
3°	13.8 Vdc self-powered sounder with LED flashing unit. External cover in stainless steel.	6	176.00
	LTO LSX		
	13.8 Vdc self-powered sounder with LED flashing unit, anti-foam and anti-shock device. External cover in stainless steel.	6	204.00
DUI	MMY		
►	Rialto housing only in painted metal cover.	6	67.00
INO	X DUMMY		
►	Rialto housing only in stainless steel cover.	6	100.00
CUS	TOMIZATIONS	PF	RICE PER UNIT €
Extra	a cost for customized colors (50 pcs. min.)	U	PON REQUEST
Emb	ossed stickers (200 pcs. min.) - Serigraphies (50 pcs. min.) - Decal (50 pcs. min.)	U	PON REQUEST




INDOOR ALARM SOUNDERS

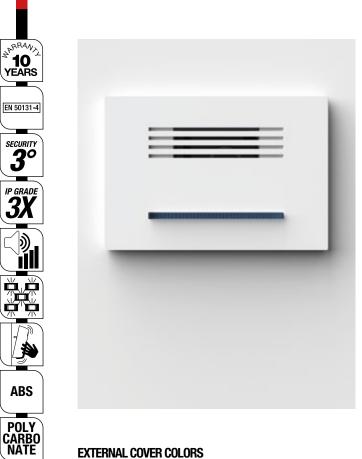

MINI GIUDEC

Multifunction recessed sounder for indoors with two different sounds and high-luminosity LED system for various light scenarios.

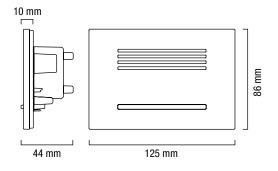


EXTERNAL COVER COLORS






RECESSED MOUNTING


- Removable terminal block to make LED wiring easier
- · Recessed mounting kit
- · Snap-fit cover fixing

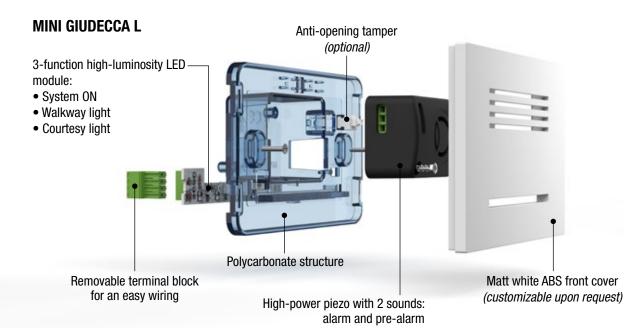



FLUSH-MOUNTING BOX (optional)





CUSTOMIZATIONS UPON REQUEST






		UNITS/PACK	PRICE PER UNIT €
	ectric recessed indoor sounder with high-level sound for alarm and low-level rm. ABS front cover. Available colors: matt white.	2	31.00
	lectric recessed indoor sounder with high-level sounds for alarm and for pre-alarm. 3-function high-luminosity LED module. ABS front cover. natt white.	2	59.00
EXTERNAL COVER	External cover - Painted ABS external cover. Available colors: matt black, matt grey.	2	13.00
LED MODULE	Fixed light LED module.	10	28.00
TAMPER	Anti-opening tamper.	10	9.00
MOUNTING KIT	Recessed mounting kit for brick and plasterboard walls.	2	11.00



MINI DOGI

Compact and elegant indoor sounder with new blue LED for courtesy-light function.



113 mm

BLUE LED for courtesy-light function



EXTERNAL COVER COLORS



FLASH COVER COLORS

Orange


Light blue

Smoke grey

MINI DOGE

Integrated piezo high-power emitter

MINI DOGE AL

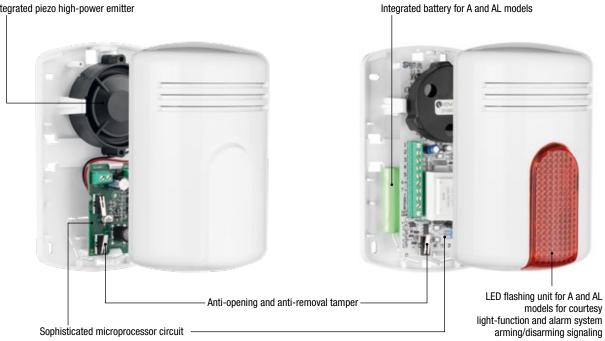




		UNITS/PACK	PRICE PER UNIT €
MIN	II DOGE		
SECURITY 3°	13.8 Vdc piezoelectric indoor sounder with high-level sounds for alarm and low-level sounds for pre-alarm.	20	48.00
MIN	II DOGE L		
SECURITY 3°	13.8 Vdc piezoelectric indoor sounder with LED flashing unit. High-level sounds for alarm and low-level sounds for pre-alarm. Blue LED for courtesy-light function.	20	62.00
MIN	II DOGE A		
SECURITY 3°	13.8 Vdc self-supplied piezoelectric indoor sounder with high-level sounds for alarm and low- level sounds for pre-alarm. 8.4 Vdc 800 mA Ni-Mh battery included.	20	90.00
MIN	II DOGE AL		
SECURITY 3°	13.8 Vdc self-supplied piezoelectric indoor sounder with LED flashing unit. High-level sounds for alarm and low-level sounds for pre-alarm. Blue LED for courtesy-light function. 8.4 Vdc 800 mA Ni-Mh battery included.	20	102.00

CUSTOMIZATIONS	PRICE PER UNIT €
* Extra cost for grey painting	13.00
Extra cost for customized colors (50 pcs min.)	UPON REQUEST



MINI HEMA

Sounder with small dimension and new blue LED for courtesy-light function. It is suitable for any settings offering design and protection.



BLUE LED for courtesy-light function



EXTERNAL COVER COLOR




FLASH COVER COLORS

Light blue

MINI HEMA

Smoke grey



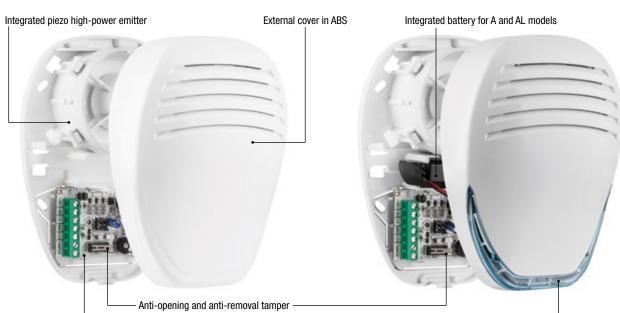

LED flashing unit for A and AL models for courtesy light-function and alarm system arming/disarming signaling



		UNITS/PACK	PRICE PER UNIT €
MIN	NI HEMA		
SECURITY 3°	13.8 Vdc piezoelectric indoor sounder with high-level sounds for alarm and low-level sounds for pre-alarm.	20	41.00
MIN	NI HEMA L		
SECURITY 3 °	13.8 Vdc piezoelectric indoor sounder with LED flashing unit. High-level sounds for alarm and low-level sounds for pre-alarm. Blue LED for courtesy-light function.	20	61.00
MIN	NI HEMA A		
	13.8 Vdc self-supplied piezoelectric indoor sounder with high-level sounds for alarm and low- level sounds for pre-alarm. 8.4 Vdc 170 mA Ni-Mh battery included.	20	73.00
MIN	NI HEMA AL		
	13.8 Vdc self-supplied piezoelectric indoor sounder with LED flashing unit. High-level sounds for alarm and low-level sounds for pre-alarm. Blue LED for courtesy-light function. 8.4 Vdc 170 mA Ni-Mh battery included.	20	87.00


PRICE PER UNIT €

UPON REQUEST



MINI MARINA

Tiny and stylish indoor sounder with new blue LED for courtesy-light function allowing an aesthetic continuity with its outdoor version.



BLUE LED for courtesy-light function



MINI MARINA

Light blue


Matt white

FLASH COVER COLORS

Smoke grey

EXTERNAL COVER COLOR

MINI MARINA AL

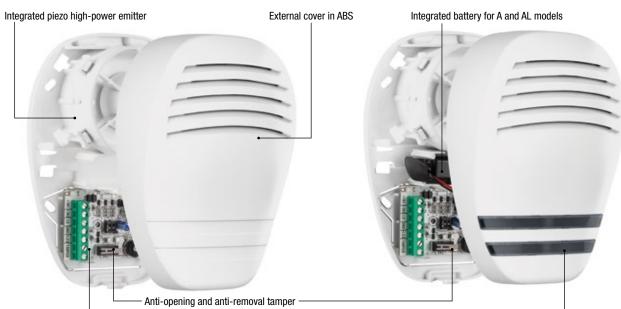

LED flashing unit for A and AL models for courtesy light-function and alarm system arming/disarming signaling

Sophisticated microprocessor circuit



		UNITS/PACK	PRICE PER UNIT €
MIN	II MARINA		
security 3°	13.8 Vdc piezoelectric indoor sounder with high-level sounds for alarm and low-level sounds for pre-alarm.	20	41.00
MIN	NI MARINA L		
	13.8 Vdc piezoelectric indoor sounder with high LED flashing unit. High-level sounds for alarm and low-level sounds for pre-alarm. Blue LED for courtesy-light function.	20	61.00
MIN	II MARINA A		
2°	13.8 Vdc self-supplied piezoelectric indoor sounder with high-level sounds for alarm and low-level sounds for pre-alarm. 8.4 Vdc 170 mA Ni-Mh battery included.	20	73.00
MIN	II MARINA AL		
	13.8 Vdc self-supplied piezoelectric indoor sounder with LED flashing unit. High-level sounds for alarm and low-level sounds for pre-alarm. Blue LED for courtesy-light function. 8.4 Vdc 170 mA Ni-Mh battery included.	20	87.00

CUSTOMIZATIONS Extra cost for customized colors (50 pcs min.) PRICE PER UNIT €

UPON REQUEST




MINI MURANO

Sounder with small dimension and new blue LED for courtesy-light function. Combines award-winning design with user-friendly technology.

security&safety award 2010

security innovation



54 mm

BLUE LED for courtesy-light function



EXTERNAL COVER COLOR




Shiny white

FLASH COVER COLORS

Orange Light blue Smoke grey

MINI MURANO

MINI MURANO AL

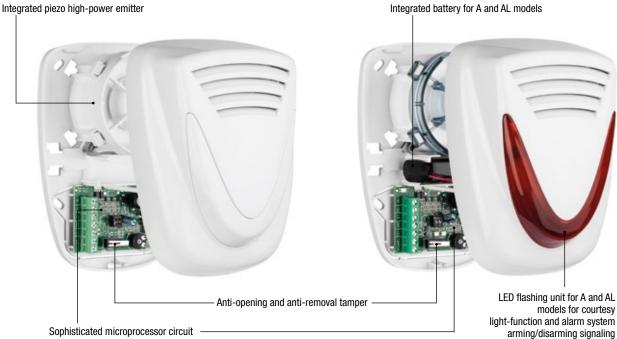






		UNITS/PACK	PRICE PER UNIT €
MIN	II MURANO		
SECURITY 3°	13.8 Vdc piezoelectric indoor sounder with high-level sounds for alarm and low-level sounds for pre-alarm.	20	39.00
MIN	II MURANO L		
SECURITY 3°	13.8 Vdc piezoelectric indoor sounder with LED flashing unit. High-level sounds for alarm and low-level sounds for pre-alarm. Blue LED for courtesy-light function.	20	58.00
MIN	II MURANO A		
2°	13.8 Vdc self-supplied piezoelectric indoor sounder with high-level sounds for alarm and low- level sounds for pre-alarm. 8.4 Vdc 170mA Ni-Mh battery included.	20	70.00
MIN	II MURANO AL		
	13.8 Vdc self-supplied piezoelectric indoor sounder with LED flashing unit. High-level sounds for alarm and low-level sounds for pre-alarm. Blue LED for courtesy-light function. 8.4 Vdc 170 mA Ni-Mh battery included.	20	85.00

UPON REQUEST



MINI HOLA

Indoor sounder with a linear design and high performances, equipped with a blue LED for courtesy light function.



50 mm

BLUE LED for courtesy-light function



EXTERNAL COVER COLORS



FLASH COVER COLORS


Orange



MINI HOLA

Integrated piezo high-power emitter


MINI HOLA AL

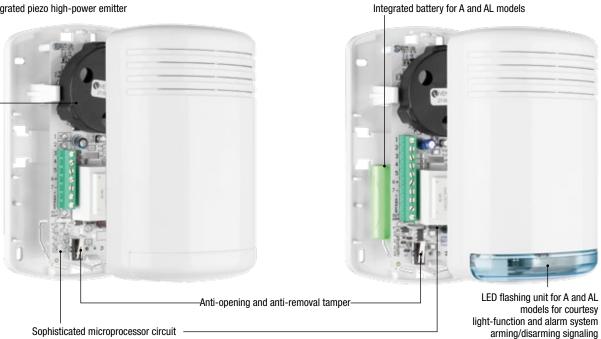

Sophisticated microprocessor circuit




		UNITS/PACK	PRICE PER UNIT €	
MIN	II HOLA			
	13.8 Vdc piezoelectric indoor sounder with high-level sounds for alarm and low-level sounds for pre-alarm.	20	47.00	
MIN	II HOLA L			
	13.8 Vdc piezoelectric indoor sounder with LED flashing unit. High-level sounds for alarm and low-level sounds for pre-alarm. Blue LED for courtesy-light function.	20	59.00	
MIN	II HOLA A			
	13.8 Vdc self-supplied piezoelectric indoor sounder with high-level sounds for alarm and low-level sounds for pre-alarm. 8.4 Vdc 800 mA Ni-Mh battery included.	20	86.00	
MIN	II HOLA AL			
	13.8 Vdc self-supplied piezoelectric indoor sounder with LED flashing unit. High-level sounds for alarm and low-level sounds for pre-alarm. Blue LED for courtesy-light function. 8.4 Vdc 800 mA Ni-Mh battery included.	20	98.00	
0.10				
	TOMIZATIONS	PR	ICE PER UNIT €	
	tra cost for matt white and matt grey painting		12.00	
Extra	Extra cost for customized colors (50 pcs. min.)		UPON REQUEST	





SP200

Essential and compact indoor sounder perfect for 3-module flush-mounting box.



EXTERNAL COVER COLOR



White

FLASH COVER COLOR

Orange

		UNITS/PACK	PRICE PER UNIT €
SP2	00		
Security	13.8 Vdc piezoelectric indoor sounder with high-level sound for alarm and low-level sound for pre-alarm. Possibility of application in 503 box.	20	30.00
SP2	200 L		
	13.8 Vdc piezoelectric indoor sounder with LED flashing unit, high-level sound for alarm and low-level sound for pre-alarm. Possibility of application in 503 box.	20	48.00





POWER SUPPLIES MULTIFUNTION TECHNOLOGY


SPECIAL POWER SUPPLIES



TL 1207

IP GRADE **67**


IP GRADE **67** Power supply with 230 Vca input and 2 outputs: 12 Vdc and 13.8 Vdc for lead battery rechargers. Max output current: 500 mA.





AMPEROTTO

Power supply with 230 Vca input and 12 Vdc 1.5 A output for CCTV and LED lights, with hard epoxy resin. Smallest size in the world - with cables and connector.




	UNITS/PACK	PRICE PER UNIT €
TL 1207		
Power supply with 230 Vca input and 2 outputs: 12 Vdc and 13.8 Vdc for lead battery rechargers. Max output current: 500 mA.	1	55.00
AMPEROTTO		
Power supply with 230 Vca input and 12 Vdc 1.5 A output for CCTV and LED lights. For outdoor use. IP 67 protection. 1 output jack DC connector included.	1	20.00

13.8 VDC AND 27.6 VDC SPECIAL POWER SUPPLIES FOR INTRUSION AND CCTV SYSTEM



TL 132


13.8 Vdc 2 A power supply. 1 output for battery recharge and 1 independent output. Linear regulation with toroidal transformer. Red LED for overload indication.






TL 133

13.8 Vdc 3 A power supply. 1 output for battery recharge and 1 independent output. Linear regulation with toroidal transformer. LED ammeter and overload signaling.






TL 135 13.8 Vdc 5 A power supply. 1 output for battery recharge and 3 independent outputs. Linear regulation with toroidal transformer. LED ammeter and overload signaling.

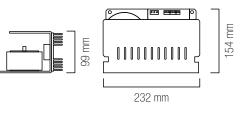

	UNITS/PACK	PRICE PER UNIT €
TL 132		
13.8 Vdc 2 A power supply with toroidal transformer. Input: 230 Vac. 1 output for battery recharge and 1 independent output.	1	134.00
TL 133		
13.8 Vdc 3 A power supply with toroidal transformer. Input: 230 Vac. 1 output for battery recharge and 2 independent outputs.	1	165.00
TL 135		
13.8 Vdc 5 A power supply with toroidal transformer. Input: 230 Vac. 1 output for battery recharge and 3 independent outputs.	1	231.00

STABILIZED POWER SUPPLIES IN BOX

Power supply unit for intrusion alarm systems equipped with control board on the front panel, finished with an elegant LED backlit synoptic indicator. Protected against polarity inversion and short circuit, with input-output protection fuses.

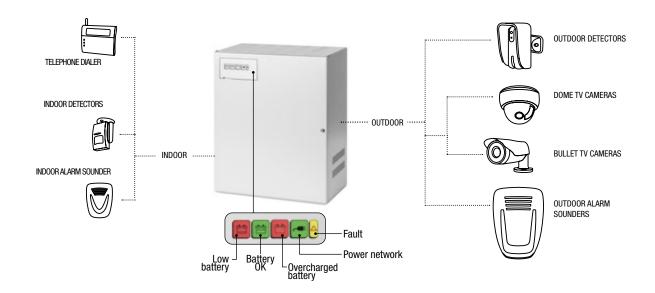

	UNITS/PACK	PRICE PER UNIT €
TUL 133 EN - EN 50131-6 certified, security grade 3.		
 13.8 Vdc 3.5 A linear power supply in painted metal box with toroidal transformer. 230 Vac. 1 output for battery recharge and 3 independent outputs. Certificate EN 5 6, security grade 3. LED ammeter with overload indication. Battery: max 1 of 38 / Dimensions: (HxLxD) 310x373x175 mm. 	i0131- ₁	337.00
TUL 132		
13.8 Vdc 2 A linear power supply in painted metal box with toroidal transformer. I 230 Vac. 1 output for battery recharge and 1 independent outputs. Red LED for ove indication. Housing for 1 7 Ah battery. Box TB1.	•	249.00
TUL 133		
13.8 Vdc 3 A linear power supply in painted metal box with toroidal transformer. I 230 Vac. 1 output for battery recharge and 2 independent outputs. Red LED for ove indication. Housing for 2 7 Ah batteries. Box TB2.	•	304.00
TUL 135		
13.8 Vdc 5 A linear power supply in painted metal box with toroidal transformer. I 230 Vac. 1 output for battery recharge and 3 independent outputs. Red LED for ove indication. Housing for 2 7 Ah batteries or 2 17 Ah batteries or 1 38 Ah battery. Box	erload 1	380.00


EN 50131-6

OUTDOOR POWER SUPPLIES IN WATERPROOF BOX

Power supplies for CCTV, ideal for installations in unprotected outdoor environments. Possibility to realize products with customized power or boxes on request.

IP GRADE **56**

IP GRADE **56**

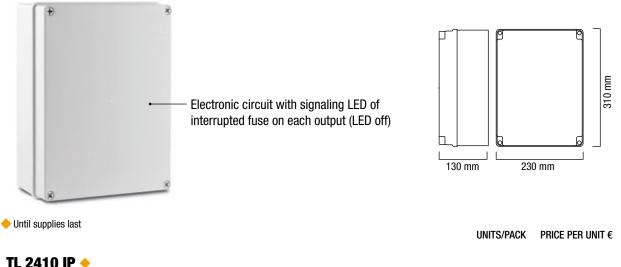

 24 Vac 100 VA, current 3.5 A max outdoor power supply for CCTV systems in IP 56 plastic box. Input: 230 Vac. 6 independent outputs protected by fuses. 	1	183.00
TL 2415 IP		
24 Vac 100 VA, current 5 A max outdoor power supply for CCTV systems in IP 56 plastic box. Input: 230 Vac. 6 independent outputs protected by fuses.	1	231.00




CCTV SWITCHING POWER SUPPLIES



TSWs are adjustable switching power supplies for CCTV, domotics and LED lighting systems, with integrated charger for backup batteries. These high power devices are placed in a compact box and are able to supply up to 8 independent cameras. TSWs enable output voltage setting in order to compensate cable voltage drop in medium-to-big CCTV systems. **Housing for 7 Ah, 17 Ah or 38 Ah batteries depending on the model** - metal box complete with anti-opening tamper.


	UNITS/PACK	PRICE PER UNIT €
TSW 155		
Adjustable at 12.0/12.8/13.8 Vdc, 5 A switching power supply for CCTV, domotics installations, LED illuminators with battery-recharge. Input: 230 Vac. 5 outputs, of which 1 for battery-recharge. TB1 box.	1	204.00
TSW 155 C		
Adjustable at 12.0/12.8/13.8 Vdc, 5 A switching power supply for CCTV, domotics installations, LED illuminators, battery-recharge and synoptic control board. Output for anomalies and mains failure. Input: 230 Vac. 5 outputs, of which 1 for battery-recharge. TB1 box.	1	261.00
TSW 157		
Adjustable at 12.0/12.8/13.8 Vdc, 7 A switching power supply for CCTV, domotics installations, LED illuminators with battery-recharge. Input: 230 Vac. 9 outputs, of which 1 for battery-recharge. TB2 box.	1	251.00
TSW 157 C		
Adjustable at 12.0/12.8/13.8 Vdc, 7 A switching power supply for CCTV domotics installations, LED illuminators, battery-recharge and synoptic control board. Output for anomalies and mains failure. Input: 230 Vac. 9 outputs, of which 1 for battery-recharge. TB2 box.	1	308.00
TSW 1510		
Switching power supply contained in painted metal box. Input: 230 Vac - output: 12-14 Vdc, 10 A. 1 output for battery recharge and 8 outputs in two different groups. Perfect for CCTV, domotics installations, LED illuminators. Output for anomalies and mains failure. TB3 box.	1	411.00
TSW 1510 C		
Switching power supply contained in painted metal box. Input: 230 Vac - output: 12-14 Vdc, 10 A. 1 output for battery recharge and 8 outputs in two different groups. Frontal synoptic control board. Perfect for CCTV, domotics installations, LED illuminators. Output for anomalies and mains failure. TB3 box.	1	444.00

12 VAC STABILIZED TENSION REDUCERS

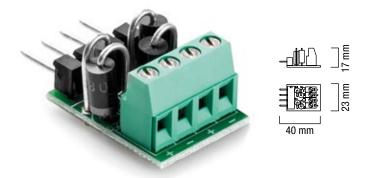

V 12

Voltage reducer from 13.8 Vdc to 12 Vdc for infrared TV cameras and other products. 2 outputs of max 1 Ah each.

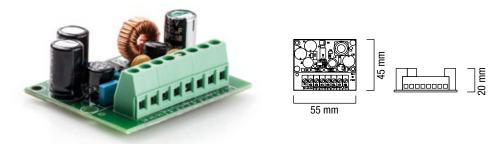

V 4512

16 - 24 Vdc or 17 - 32 Vac voltage reducer with internal stabilizer and signaling LED of reducer activated. Output: 12 - 13.8 Vdc.

+ Until supplies last

	UNITS/PACK	PRICE PER UNIT €
V12 🔶		
 Voltage reducer from 13.8 Vdc to 12 Vdc for infrared TV cameras and other products. 2 outputs of max 1 Ah each. 	4	13.00
V4512		
16 - 24 Vdc or 17 - 32 Vac voltage reducer with internal stabilizer and signaling LED of reducer activated. Output: 12 - 13.8 Vdc.	2	46.00

BOXES FOR POWER SUPPLIES

Elegant metal box, polyester-powder painting process, equipped with anti-opening tamper.




BOX TB3 BOX TB2 BOX TB1

	UNITS/PACK	PRICE PER UNIT €
TB1		
Metal box for TL 132 with polyester painting and anti-opening tamper. Dimensions: (HxLxD) 265x217x113mm	1	93.00
TB2		
 Metal box for TL 133 with polyester painting and anti-opening tamper. Dimensions: (HxLxD) 373x282x127mm 	1	135.00
TB3		
Metal box for TL 135 - TL 373 - TL 375 with polyester painting and anti-opening tamper. Dimensions: (HxLxD) 373x310x175mm	1	145.00





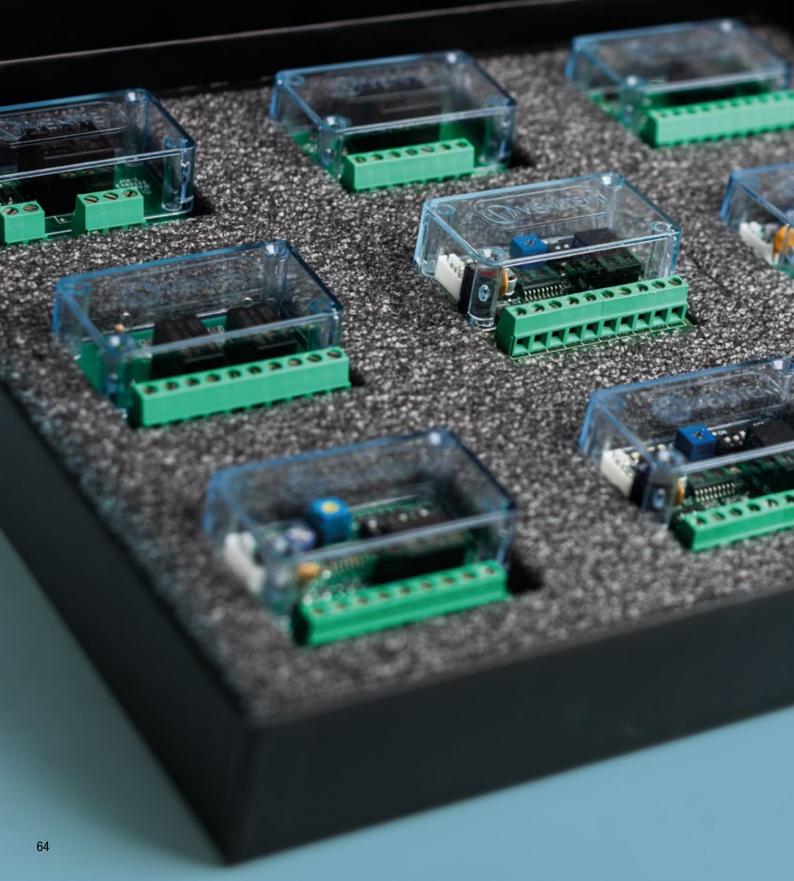



RELAY AND MULTIFUNCTION BOARDS

Relay and multifunction boards with different settings and timing options, for intrusion, CCTV, and home automation. Possibility of installation in complex electrical panels thanks to the functionality of the protective box for DIN track.



FULL RELAY - 12/24 Vdc/Vac relay interface board, 40 mA @ 24 Vdc power supply max consumption. Opto-isolated input 3 - 30 Vdc/Vac max 10 mA. 1 DPDT (Double Pole, Double Throw) output with dry contact with maximum 8 A 250 Vdc/Vac. 2 8 Ah outputs or 1 16 Ah output. Dimensions: (HxLxD) 60x48x26 mm - weight: 48 gr.



RA/T - 12 Vdc low consumption relay interface board for open collector driver with relay output. 1 1 mA input and 1 relay output 3 A. Signalling LED. Dimensions: (HxLxD) 55x45x18 mm weight: 26 gr.



RA - 12 Vdc relay interface board for open collector driver with relay output. 1 35 mA input and 1 relay output 3 A. Signalling LED. Dimensions: (HxLxD) 55x45x18 mm - weight: 24 gr.



RN 12/24 - 12/24 Vdc relay interface board for open collector with 2 inputs and 2 relay outputs. 2 25 mA inputs and 2 relay outputs a each. Signalling LED. Dimensions: (HxLxD) 55x45x17 mm – weight: 30 gr.



RA/2S - 12 Vdc low consumption relay interface board for open collector with two opto-isolated outputs. 1 mA input and 2 relay outputs 1A each. Signalling LED. Dimensions: (HxLxD) 55x45x17 mm - weight: 26 gr.

	UNITS/PACK In Blister	PRICE PER UNIT €
BOX		
BOX Customizable box with 9 relay and multifunction boards of your choice.	1 BOX	UPON REQUEST
FULL RELAY		
12/24 Vdc/Vac relay interface board, 40 mA @ 24 Vdc power supply max consumption. Opto-isolated input from 3 to 30 Vdc/Vac max 10 mA. 1 DPDT (Double Pole, Double Throw) output with dry contact with maximum 8 A 250 Vdc/Vac.	1	31.00
RA		
12 Vdc relay interface board with 1 35 mA input and 1 3 A relay output.	2	14.00
RA/T		
▶ 12 Vdc low consumption relay interface board with 1 1 mA input and 1 3 A relay of	utput. 2	15.00
RA/2S		
▶ 12 Vdc low consumption relay interface board with 1 1 mA input and 2 1 A relay out	tputs. 2	23.00
RN 12/24		
▶ 12/24 Vdc relay interface board with 2 25 mA inputs and 2 1 A relay outputs.	2	21.00
DIN BOX		
Protective plastic box for DIN track. Compatible with all our relay and multifun boards.	nction 2	7.00

Adhesive plastic bracket for relay and multifunction boards.

10



MCX - 12 Vdc multifunction board, 1 contact for rolling shutters, inertial and vibration sensors -11 mA input, 11 A output relay -1 0.C. output. Dimensions: 55x45x18 mm (HxLxD) - weight: 23 gr.



MTT - 12 Vdc multifunction board for all timings – 1 1 mA inputs – 1 1 A relay output – 1 0.C. output. Dimensions: 55x45x18 mm (HxLxD) - weight: 23 gr.



MCV - 12 Vdc multifunction board for rolling shutter and magnetic contacts (up to 4 in total), 1 1 A output and 1 opto-isolated output. Dimensions: 55x45x18 mm (HxLxD) - weight: 25 gr.

	UNITS/PACK IN BLISTER	PRICE PER UNIT €
MTT		
 12 Vdc multifunction board for all timings, 1 1 mA inputs, 1 1 A relay output, 1 0.C. output. 	2	45.00
MCX		
12 Vdc multifunction circuit for rolling-shutter contacts, inertial and vibration sensors – 1 1 mA input, 1 1 A relay output – 1 1 A O.C. output.	2	34.00
MCV		
12 Vdc multifunction circuit for rolling shutters and magnetic contacts (up to 4 contacts max). 1 1 A output and 1 opto-isolated output.	2	45.00
DIN BOX		
Protective plastic box for DIN track. Compatible with all our relay and multifunction boards.	2	7.00
TSP		
 Adhesive plastic bracket for relay and multifunction boards. 	10	1.50



MAGNETIC *contacts*

MAGNETIC CONTACTS

+ Until supplies last

		UNITS/PACK	PRICE PER UNIT €
MC 50 🔶			
0	Inertial vibration sensor in ABS for shock detection. Flush mounting. Cable length: 170 cm.	5	13.00
MC 100 🔶			
	Magnetic contact for flush mounting, brass housing, with anti-tampering wire. Cable length: 200 mm. Average operating distance: 12 mm.	10	6.00
MC 110 🔶			
	Magnetic contact for flush mounting, plastic housing, with anti-tampering wire. Cable length: 200 mm. Average operating distance: 12 mm. Available color: white.	10	5.00
MC 150B 🔶			
	Plastic magnetic contact for flush mounting, high tolerance (armoured doors), screw connection. Max operating distance on wood/plastic: 20 mm - on iron: 10 mm. Available color: white.	5	13.00
MC 150M 🔶			
	Plastic magnetic contact for flush mounting, high tolerance (armoured doors), screw connection. Max operating distance on wood/plastic: 20 mm - on iron: 10 mm. Available color: brown.	5	13.00
MC 200M 🔶			
11	Plastic magnetic contact, surface mounting with hidden-screw connection and installation. Max operating distance on wood/plastic: 20 mm - on iron: 10 mm. Available color: brown.	10	8.00
MC 250 🔶			
	Plastic-housing magnetic contact, extra-slim, surface mounting, double magnets, two wires. Wires length: 200 mm. Avarage operating distance: 15 mm.	10	7.00





OPTICAL-ACOUSTIC SIGNALERS



OPTICAL











RLI 3-30V Steady-light repeater for flush installation - with colored LED power supply from 3 Vdc to 30 Vdc

White

Grey

Chrome

Black

UNITS/PACK PRICE PER UNIT €

20,00

RLI 3-30V

Steady-light repeater for flush installation - with colored LED - power supply from 3Vdc to 30Vdc - consumption: 10 mA. Support available in the following colors: white, grey, chrome, transparent, black. LED available in the following colors: red, white, green, blue, yellow.

ACOUSTIC



	UNITS/PACK	PRICE PER UNIT €
BZ96		
Piezoelectric buzzer - power supply 3-24 Vdc - consumption 13 mA - sound power 96 dB (A) @ 30 cm.	1	16.00
BZ100		
Piezoelectric buzzer - power supply 9-15 Vdc - consumption 130 mA - sound power 108 dB (A) @ 30 cm.	1	16.00



OUTDOOR *DETECTORS*

St. 19 Enter



FARO TRIBALANCE

Wired volumetric detector for outdoors, triple technology with anti-masking and anti-approaching, IP65. Temperature compensation and pet immunity. Partializing lenses for the beams and 45° adapter included.

• Dimensions without accessories: 185x85x80 mm


STANDARD ACCESSORIES




45° ADAPTER Bracket for angle mounting


Partializers for lenses

TRIBALANCE 8.12

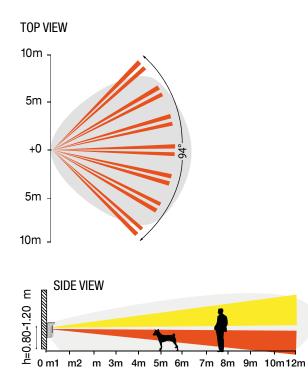

TRIBALANCE 21.23

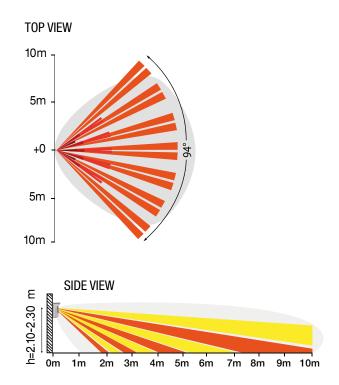

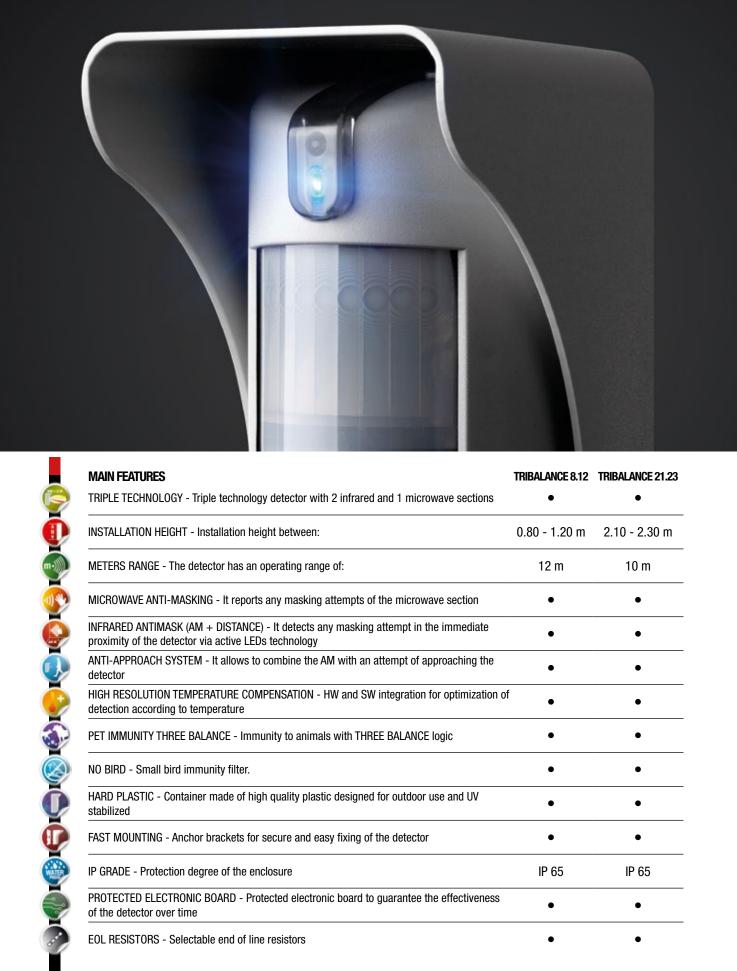

MAIN FEATURES TRIPLE TECHNOLOGY - Triple technology detector with 2 infrared and 1 microwave sections	TRIBALANCE 8.12	TRIBALANCE 21.23
INSTALLATION HEIGHT - Installation height between:	0.80 - 1.20 m	2.10 - 2.30 m
METERS RANGE - The detector has an operating range of:	12 m	10 m
MICROWAVE ANTI-MASKING - It reports any masking attempts of the microwave section	•	•
INFRARED ANTIMASK (AM + DISTANCE) - It detects any masking attempt in the immediate proximity of the detector via active LEDs technology	•	•
ANTI-APPROACH SYSTEM - It allows to combine the AM with an attempt of approaching the detector	•	•
HIGH RESOLUTION TEMPERATURE COMPENSATION - HW and SW integration for optimization of detection according to temperature	f •	•
PET IMMUNITY THREE BALANCE - Immunity to animals with THREE BALANCE logic	•	•
NO BIRD - Small bird immunity filter.	•	•
HARD PLASTIC - Container made of high quality plastic designed for outdoor use and UV stabilized	٠	•
FAST MOUNTING - Anchor brackets for secure and easy fixing of the detector	•	•
IP GRADE - Protection degree of the enclosure	IP 65	IP 65
PROTECTED ELECTRONIC BOARD - Protected electronic board to guarantee the effectiveness of the detector over time	•	•
EOL RESISTORS - Selectable end of line resistors	•	•
U	NITS/PACK	PRICE PER UNIT €

	UNITO/TAUX	
FARO TRIBALANCE 8.12	5	293.00
FARO TRIBALANCE 21.23	5	293.00




SECURITY

FARO TRIBALANCE 8.12 ENERGY LINE

Outdoor battery-powered volumetric detector for wireless systems, low consumption, triple technology and anti-masking.

- Power supply: Lithium battery 3 V or 3.6 V
- Dimensions without accessories: 185x85x80 mm

STANDARD ACCESSORIES

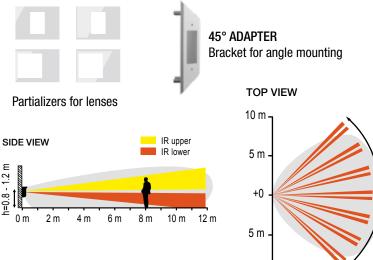

10 m -

MAIN FEATURES

TRIPLE TECHNOLOGY - Triple technology detector with 2 infrared and 1 microwave sections

0

INSTALLATION HEIGHT - Installation height between: 0.80 - 1.20 m

METERS RANGE - The detector has an operating range of: 12 m

WIRELESS - Low consumption stand-alone detector for wireless systems

INFRARED ANTI-BLINDING - It reports any blinding attempts of the infrared lens

HIGH RESOLUTION TEMPERATURE COMPENSATION - HW and SW integration for optimization of detection according to temperature

PET IMMUNITY - Pet immunity against small animals

HARD PLASTIC - Container made of high quality plastic designed for outdoor use and UV stabilized

FAST MOUNTING - Anchor brackets for secure and easy fixing of the detector

LED ON - Activates detection displays in the operating mode

STAND-BY - Selectable stand-by delay

IP GRADE - Protection degree of the enclosure: IP 65

PROTECTED ELECTRONIC BOARD - Protected electronic board to guarantee the effectiveness of the detector over time

UNITS/PACK PRICE PER UNIT €




FARO IP PLUS

Wired curtain detector for outdoors, double technology (MW+PIR) with anti-masking and anti-blinding. IP65, suitable for installations exposed to bad weather conditions. Temperature compensation and filter for small insects. Brackets and adapter for angle, wall and ceiling included.

• Dimensions without accessories: 110x44x46 mm

OPTIONAL:

PET lens

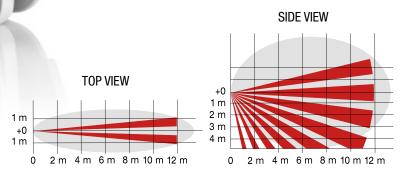

MAIN FEATURES

SECURITY

2°

DT - Dual-technology detector (MW+PIR)

METERS RANGE - The detector has an operating range of: 10 - 12 m

MICROWAVE ANTI-MASKING - It reports any masking attempts of the microwave section

INFRARED ANTI-BLINDING - It reports any blinding attempts of the infrared lens

EXTRA FILTER - Extra white light immunity filter

PET IMMUNITY - Pet immunity against small animals (with the use of the dedicated lens)

CROSSING / APPROACHING - The detector can be set to work in crossing-mode ("curtain") or in approaching-mode ("corridor")

TEMPERATURE COMPENSATION - Processing algorithms automatically optimize the detection according to the temperature

BUG ANTI-MASKING - Anti-masking with filter for small insects

LED OFF - It deactivates detection notice while memory notice is kept enabled

HARD PLASTIC - Container made of high quality plastic designed for outdoor use and UV stabilized

IP GRADE - Protection degree of the enclosure: IP 65

PROTECTED ELECTRONIC BOARD - Protected electronic board to guarantee the effectiveness of the detector over time

	UNITS/PACK	PRICE PER UNIT €
FARO IP PLUS	10	200.00
PET LENS - Partializing lens for immunity to animals	1	6.00
TAMPER KIT - Tamper kit against pulling out attemps - requires the HUB-P	1	12,00




FARO DEDZONE

Wired curtain detector for outdoors, double technology (MW+PIR) with anti-masking and anti-blinding. Suitable for covered installations.

• Dimensions without accessories: 110x44x46 mm



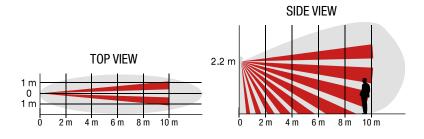

MAIN FEATURES

DT - Dual-technology detector (MW+PIR)

METERS RANGE - The detector has an operating range of 10 m

MICROWAVE ANTI-MASKING - It reports any masking attempts of the microwave section

INFRARED ANTI-BLINDING - It reports any blinding attempts of the infrared lens

PET IMMUNITY - Pet immunity against small animals (with the use of the dedicated lens)

CROSSING / APPROACHING - The detector can be set to work in crossing-mode ("curtain") or in approaching-mode ("corridor")

TEMPERATURE COMPENSATION - Processing algorithms automatically optimize the detection according to the temperature

LED OFF - It deactivates detection notice while memory notice is kept enabled

IP GRADE - Protection degree of the enclosure: IP 54


		UNITA' PER CONFEZIONE	PREZZ0 € / UNIT	A'
FARC	PLUS	10	200,00	
LENT P	ET - Lente parzializzatrice per immunità agli animali	1	6,00	_
КІТ Т. МІ	PER - Kit tamper antistrappo - necessita di snodo HUB-P	1	12,00 UNITS/PACK	PRICE PER UNIT €
	FARO DEDZONE		25	138,00
TAMPER KIT - Tamper kit against pulling out attemps - requires the HUB-P		1	12,00	
	PROTECTION KIT - Roof (Promask) + Bracket (HUB-P) + Ceiling adapter (HUB-CP)		1	34,00
	PET LENS - Partializing lens for immunity to animals		1	6,00

FARO IP ENERGY LINE

Outdoor **battery-powered curtain detector for wireless systems**, double technology (MW+PIR) low consumption. IP65, suitable for installations exposed to bad weather conditions. Temperature compensation. Brackets and adapter for angle, wall and ceiling included.

- Power supply: Lithium battery 3 V or 3.6 V
- Dimensions without accessories: 110x44x46 mm

OPTIONAL:

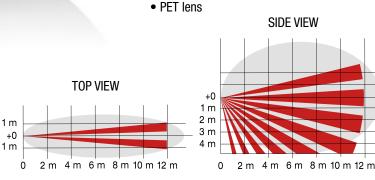

MAIN FEATURES

SECURITY

2°

DT - Dual-technology motion detector (MW+PIR) stand-alone

METERS RANGE - The detector has an operating range of 12 m

INFRARED ANTI-BLINDING - It reports any blinding attempts of the infrared lens

EXTRA FILTER - Extra white light immunity filter

WIRELESS - Low consumption stand-alone detector for wireless systems

PET IMMUNITY - Pet immunity against small animals (with the use of the dedicated lens)

NO/NC - NO/NC alarm contact selectable by DIP SWITCH

TEMPERATURE COMPENSATION - Processing algorithms automatically optimize the detection according to the temperature

STAND-BY - Selectable stand-by delay

LED ON - Activates detection displays in the operating mode

HARD PLASTIC - Container made of high quality plastic designed for outdoor use and UV stabilized

IP GRADE - Protection degree of the enclosure: IP 65

PROTECTED ELECTRONIC BOARD - Protected electronic board to guarantee the effectiveness of the detector over time


	UNITS/PACK	PRICE PER UNIT €
FARO IP ENERGY LINE	12	280.00
PET LENS - Partializing lens for immunity to animals	1	6.00

FARO MINI

Wired curtain detector for the protection of openings, double technology (MW+PIR).

• Dimensions without accessories: 110x44x46 mm



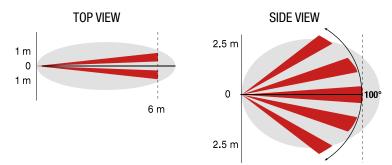

MAIN FEATURES

DT - Dual-technology motion detector (MW+PIR)

METERS RANGE - The detector has an operating range of 5 m (side mounting) or 2.5 m (top mounting)

AND - The alarm is launched when microwave AND infrared detect the intruder

MEMO - After system disarming, this function notifies the first alarm occured

LED OFF - It deactivates detection notice while memory notice is kept enabled

IP GRADE - Protection degree of the enclosure: IP 54

PROTECTED ELECTRONIC BOARD - Protected electronic board to guarantee the effectiveness of the detector over time

	UNITS/PACK	PRICE PER UNIT €
FARO MINI	60	98,00
PROTECTION KIT - roof + 90° bracket	1	19,00

FARO WINDO ENERGY LINE


Battery-powered curtain detector for wireless systems, double technology (MW+PIR) low consumption, suitable for the protection of openings.

- Power supply: Lithium battery 3 V or 3.6 V
- Dimensions without accessories: 220x40x30 mm

STANDARD ACCESSORIES

Bracket for fixing at 90°

2 partializing Pet lens

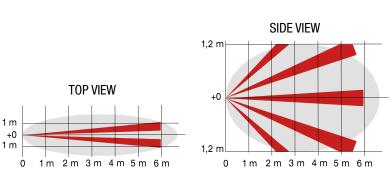

MAIN FEATURES

DT - Dual-technology motion detector (MW+PIR) stand-alone

METERS RANGE - The detector has an operating range of 6 m (side mounting) or 3 m (top mounting)

WIRELESS - Low consumption stand-alone detector for wireless systems

INFRARED ANTI-BLINDING - It reports any blinding attempts of the infrared lens

PET IMMUNITY - Pet immunity against small animals (with the use of the dedicated lens)

NO/NC - NO/NC alarm contact selectable by DIP SWITCH

TEMPERATURE COMPENSATION - Processing algorithms automatically optimize the detection according to the temperature

LED ON - Activates detection displays in the operating mode

STAND-BY - Selectable stand-by delay

SHUTTER/PERIMETER PROTECTION FUNCTION - Functions settable by DIP SWITCH

IP GRADE - Protection degree of the enclosure: IP 65

PROTECTED ELECTRONIC BOARD - Protected electronic board to guarantee the effectiveness of the detector over time

FARO WINDO

UNITS/PACK

PRICE PER UNIT €

155.00











class

FARO SUPER DT

Wired volumetric detector for indoor installations, dual-technology (MW+PIR), with pet immunity.

• Dimensions without accessories: 107x61,5x43,5 mm



OPTIONAL: • HUB-DT - Adapter for wall and ceiling installation

MAIN FEATURES

METERS RANGE - The detector has an operating range of 12 m

PET IMMUNITY - Pet immunity against small animals (settable by DIP SWITCH)

AND - The alarm is launched when microwave AND infrared detect the intruder

ECO/AND - Automatic microwave switching off (low environmental impact)

MEMO - After system disarming, this function notifies the first alarm occured

LED OFF - It deactivates detection notice while memory notice is kept enabled

	UNITS/PACK	PRICE PER UNIT €
FARO SUPER DT	25	56.00
HUB-DT - Adapter for wall and ceiling installation	1	6.00




FARO DT-AM PLUS

Wired volumetric detector for indoor installations, dual-technology (MW+PIR) .

• Dimensions without accessories: 108x64x46 mm

OPTIONAL:

- Corner, wall, ceiling adapter
- Anti-removal tamper (to be used with the adapter)
- · Curtain and corridor lenses



MAIN FEATURES

SECURITY

2°

class

DT - Dual-technology motion detector (MW+PIR)

METERS RANGE - The detector has an operating range of 15 mt

MICROWAVE ANTI-MASKING - It reports any masking attempts of the microwave section

INFRARED ANTI-BLINDING - It reports any blinding attempts of the infrared lens

AND/OR - Selectable detection modes

ECO - Automatic microwave switching off (low environmental impact)

SENSITIVITY - Selectable on two pre-set levels

EOL RESISTORS - Selectable end of line resistors

	UNITS/PACK	PRICE PER UNIT €
FARO DT-AM PLUS	25	64.00
HUB - Wall swivel and corner bracket	1	12.00
HUB-C - Adapter for ceiling installation - to be used together with HUB	1	9.00
CORRIDOR LENS - Corridor lens	1	7.00
CURTAIN LENS - Curtain lens	1	7.00
TAMPER KIT - Tamper kit against pulling out attemps - requires the HUB	1	12.00
















DOGE F24

Self-powered outdoor fire alarm sounder, capable of integrating high performance with any kind of alarm control unit.

EN 54-3 APPROVED



EXTERNAL COVER COLOR



Shiny red

FLASH COVER COLOR

Orange

		UNITS/PACK	PRICE PER UNIT €
	ered 24 Vdc fire alarm sounder with LED flashing unit. External cover Ø. EN 54-3 certified.	6	262.00
ACCESSORIES			
EMBOSSED STICKER	"FIRE" embossed sticker (the pack includes 10 pc). Other languages upon request.	10	48 € / conf.








TRIADE F24

Self-powered outdoor sounder for fire alarm, able to offer structural strenght and guaranteed performances.

EN 54-3 APPROVED



EXTERNAL COVER COLOR



Shiny red

FLASH COVER COLOR

Orange

		UNITS/PACK	PRICE PER UNIT €
•	vered 24 Vdc fire alarm sounder with LED flashing unit. External cover Ø. EN 54-3 certified.	6	236.00
ACCESSORIES			
EMBOSSED STICKER	"FIRE" embossed sticker (the pack includes 10 pc). Other languages upon request.	10	48 € / conf.






MOSE F24EN

Remotely-supplied outdoor sounder for fire and evacuation alarm, suitable for the aesthetic and functional valorization of any installation.

EN 54-3 APPROVED



EXTERNAL COVER COLOR



ARRAN, 10 YEARS

EN 54-3

ABS VØ

IP GRADE 44

Shiny red

FLASH COVER COLOR

Orange

MOSE F24EN

ACCESSORIES

EMBOSSED STICKER

►

Remotely-supplied (batteries not required)

- Settable low-consumption sounders
- Sound synchronism among all indoor and outdoor sounders
- 3 settable and independent alarm inputs with inversion trigger (certified) or negative-giving
- 6 sounds for alarm, pre-alarm and evacuation, certified for different Countries
- **CONSUMPTION FROM 60 mA TO 400 mA, PROGRAMMABLE FROM DIP SWITCH.**

UNITS/PACK PRICE PER UNIT € Remotely-supplied (batteries not required) 24 Vdc outdoor sounder. Settable consumption from 60 mA to 400 mA. External cover in painted ABS VØ. 3 settable and 5 219.00 independent alarm inputs. EN 54-3 certified. "FIRE" embossed sticker (the pack includes 10 pc). 10 48 € / conf. Other languages upon request.






MURANO F24EN

Outdoor **remotely-supplied** fire alarm and evacuation sounder, which integrates design and performances, perfectly suitable to all control panels.

EN 54-3 APPROVED



EXTERNAL COVER COLOR



Shiny red

FLASH COVER COLOR

Orange

/ Remotely-supplied (batteries not required)

- ✓ Settable low-consumption sounders
- Sound synchronism among all indoor and outdoor sounders
- 3 settable and independent alarm inputs with inversion trigger (certified) or negative-giving
- ✓ 6 sounds for alarm, pre-alarm and evacuation, certified for different Countries
- CONSUMPTION FROM 60 mA TO 400 mA, PROGRAMMABLE FROM DIP SWITCH.

MURANO F24EN	UNITS/PACK	PRICE PER UNIT €
Remotely-supplied (batteries not required) 24 Vdc outdoor sounder. Settable consumption from 60 mA to 400 mA. External cover in painted ABS VØ. 3 settable and independent alarm inputs. EN 54-3 certified.	5	207.00
ACCESSORIES		
EMBOSSED STICKER "FIRE" embossed sticker (the pack includes 10 pc). Other languages upon request.	10	48 € / conf.






HOLA F24EN

Outdoor **remotely-supplied** fire alarm and evacuation sounder, with a versatile design, suitable to any kind of customization.

EN 54-3 APPROVED



EXTERNAL COVER COLOR



YEARS

EN 54-3

ABS VØ

IP GRADE

Shiny red

FLASH COVER COLOR

CONSUMPTION FROM 60 mA TO 400 mA, PROGRAMMABLE FROM DIP SWITCH.

Remotely-supplied (batteries not required)

Sound synchronism among all indoor and outdoor sounders

3 settable and independent alarm inputs with inversion trigger (certified) or

6 sounds for alarm, pre-alarm and evacuation, certified for different Countries

Settable low-consumption sounders

negative-giving

Orange

	UNITS/PACK	PRICE PER UNIT €
 HOLA F24EN Remotely-supplied (batteries not required) 24 Vdc outdoor sounder. Settable consumption from 60 mA to 400 mA. External cover in painted ABS VØ. 3 settable and independent alarm inputs. EN 54-3 certified. 	5	197.00
ACCESSORIES		
EMBOSSED STICKER "FIRE" embossed sticker (the pack includes 10 pc). Other languages upon request.	10	48 € / conf.








MINI DOGE F24

Indoor fire alarm sounder with versatile design and certified technology.

EN 54-3 APPROVED

EXTERNAL COVER COLOR








MINI DOGE FL24EN

Indoor fire alarm sounder with integrated LED system for increase the alert function.

EN 54-3 APPROVED

EXTERNAL COVER COLOR





UNITS/PACK PRICE PER UNIT €

88.00

MINI DOGE F24

 Indoor remotely-supplied 24 Vdc fire alarm sounder, low consumption. External cover in ABS VØ. EN 54-3 certified.
 69.00

MINI DOGE FL24EN

Indoor remotely-supplied 24 Vdc fire alarm sounder with LED flashing unit, low consumption. External cover in ABS VØ. EN 54-3 certified.






DOGE EV

Self-powered outdoor evacuation sounder which adds to the optical LED signaling the possibility to integrate a high linearity vocal module with pre-recorded and customizable messages.

EN 50849 COMPLIANT



EXTERNAL COVER COLOR



ARRAN

10[°]YEARS

EN 50849

> ABS VØ

IP GRADE

Orange

FLASH COVER COLOR

	UNITS/PACK	PRICE PER UNIT €
DOGE EV12		
13.8 Vdc self-powered evacuation sounder with LED flashing unit.	6	207.00
DOGE EV24		
24 Vdc self-powered evacuation sounder with LED flashing unit.	6	254.00
DOGE EV230		
230 Vdc self-powered evacuation sounder with LED flashing unit.	6	264.00
DOGE EV VOCAL		
▶ 13.8 Vdc self-powered evacuation sounder with LED flashing unit and vocal module.	6	298.00

ACCESSORIES

EMBOSSED STICKER


10






CI PLEXIGLASS

Plexiglass wall frame for fire signaling. Elegant design, equipped with hole for the insertion of the sounder. "Fire Alarm" **serigraphy on both sides that allows the right/left mounting according to the need.**

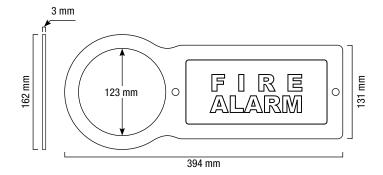

SPACERS KIT INCLUDED

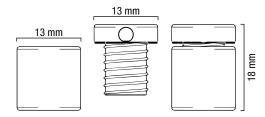

	UNITS/PACK	PRICE PER UNIT €
CI PLEXIGLASS Plexiglass wall frame for fire signaling. 	6	62.00
CUSTOMIZATIONS		PRICE PER UNIT €
Custom serigraphy		UPON REQUEST





CERTIFIED FIRE POWER SUPPLIES

0

POWER SUPPLY **CERTIFIED EN 54-4** FOR FIRE ALARM INSTALLATIONS AND **EN 12101-10** FOR **SMOKE AND HEAT EVACUATION** AND CONTROL SYSTEMS (SHE)

TUL 500 EN - Certified switching power supply with microcontroller supervisory circuit, created to ensure autonomy to fire detection systems and smoke and heat evacuation and control systems. These units are studied to guarantee supply even in case of disconnected battery or output short circuit and protect all the connected devices.



STRENGTHS

Immediate intervention: the power supply is always active. In case of 220 V mains failure, batteries instantly supply power.

Periodic checks of internal resistance and batteries efficiency for assessing their ageing process.

Functional class: A - the power supply is able to work with any type of smoke and heat evacuation and control system.

Possibility to install many power supplies for different lines increases reliability of the system.

UNITS/PACK PRICE PER UNIT €

1

TUL 500 EN

27.6 Vdc 5 A switching fire power supply contained in painted metal box, with LED ammeter and overload battery signaling. Input: 230 Vac. 4 outputs, of which 1 for battery-recharge. Backlit cover with serigraphy indicating: mains presence, battery status, general failure. EN 54-4 and EN 12101-10 certified. Dimensions: (HxLxD) 310x373x175 mm.

539.00

EN 54-4

EN 12101-10

FIRE POWER SUPPLIES

EN 54-4 CERTIFIED

TUL 375 EN - TUL 373 EN

Certified power supplies for fire systems with linear regulator (toroidal) able to significantly limit electromagnetic interference. Management with microcontroller, studied to guarantee power supply even with disconnected battery or output short circuit and protect the devices connected thanks to CROWBAR protection.







		UNITS/PACK	PRICE PER UNIT €
	TUL 375 EN		
EN 54-4	27.6 Vdc 5 A linear regulator (toroidal) fire power supply contained in painted metal box, with LED ammeter and overload battery signaling. Input: 230 Vac. 4 outputs, of which 1 for battery-recharge. Backlit cover with serigraphy indicating: mains presence, battery status, general failure. EN 54-4 certified. Dimensions: (HxLxD) 373x310x175 mm.	1	557.00
EN 54-4	 TUL 373 EN 27.6 Vdc 3 A linear regulator (toroidal) fire power supply contained in painted metal box, with LED ammeter and overload battery signaling. Input: 230 Vac. 3 outputs, of which 1 for battery-recharge. Backlit cover with serigraphy indicating: mains presence, battery status, general failure. EN 54-4 certified. Dimensions: (HxLxD) 373x310x175 mm. 	1	487.00



SOUNDERS AND PANELS FOR EMERGENCY EXIT

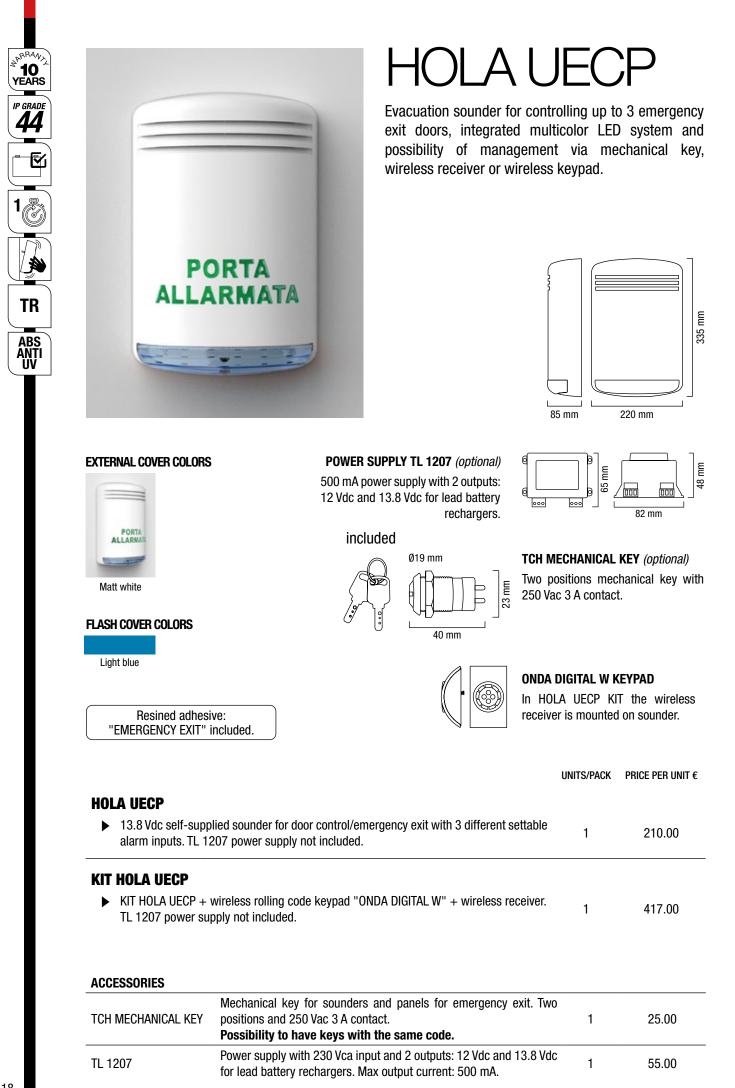








TRIADE UE

Sounder for emergency exit doors with LED system and high-resistance structure.



EXTERNAL COVER COLORS




White

FLASH COVER COLORS

Orange

"EMERGENCY EXIT" embossed sticker included



TCH MECHANICAL KEY

Two positions and 250 Vac 3 A contact mechanical key, installed as standard on the sounder cover.

		UNITS/PACK	PRICE PER UNIT €
si	E UE Elf-powered sounder 13.8 Vdc for emergency exit with flashing LED for system state gnaling and steady LED for alarm memory. TCH mechanical key included. Keys with e same code. TL 1207 power supply not included.	6	165.00
ACCESS	SORIES		
TL 1207	, Power supply with 230 Vca input and 2 outputs: 12 Vdc and 13.8 Vdc for lead battery rechargers. Max output current: 500 mA.	1	55.00








TPUS

Optical-acoustic panel for emergency exit doors able to manage up to 3 emergency doors, with high luminosity LED system and low consumption.



	UNITS/PACK	PRICE PER UNIT €
TPUS		
12 Vdc/24 Vdc optical-acoustic panel for emergency exit doors. 3 inputs and one 1 A relay output. Low profile TCH mechanical key for exclusion and/or reset included. Polycarbonate label with serigraphy customizable on demand. Possibility of flush installation. Keys with the same code.	20	149.00
TPUSA		
12 Vdc/24 Vdc optical-acoustic panel for emergency exit doors. Equipped with a 230 Vac power supply, rechargeable 9.6 Vdc 1500 mA Ni-Mh batteries included. Technical data as per TPUS. TCH mechanical key included. Keys with the same code.	20	189.00
ACCESSORIES		



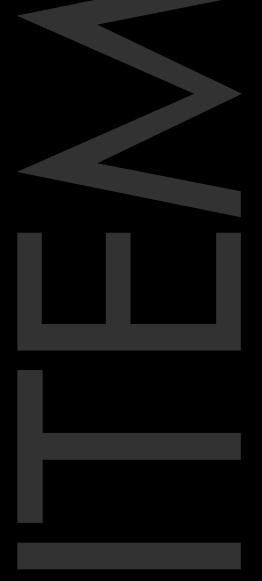

VENITEM.COM





VENITEM SRL Via del Lavoro, 10 – 30030 Salzano (VE) – Italy Ph. +39.041.5740374 - Fax +39.041.5740388 info@venitem.com – www.venitem.com